W3-R-ST103D

Deck Mounted Sensor Tap

PRODUCT FEATURES

- Automatic infrared sensor activation faucet
- Fully automatic sensor activation for personal hygiene
- Electrical sensor is isolated and sealed in waterproof compartment
- Self adjusting signal frequency to prevent interference with other sensor products

PRODUCT SPECIFICATIONS


- Dimension •
- : 180 (L) x Ø60 (W) x 157 (H) mm
- Material
- : Polished brass with chrome finish : 230VAC 50Hz
- Power Supply **Detection Range**
- : Self-adjusting to environment
- Operating Temperature
- : 0 40°C : 70 kPa (flowing) - 700 kPa
- Supply Pressure Water Consumption
- Saving Feature
- : 10 secs. Faucet: 0.35 litre per cycle
- **Detection Time**
- : Auto cut-off when hands are removed : ON feature: Immediate
- OFF feature: 0.5 secs. delay

WATER CONSUMPTION

- WELS Rating
- : Excellent VVV : 2.0L/minute
- Water Flow Rate Water Saving
- : 66%

TECHNICAL DRAWING

*Pending for WELS Certification

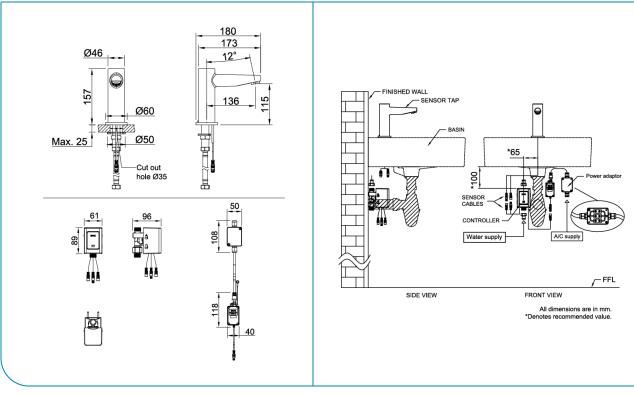

DISCLAIMER: While every effort has been made to ensure factual accuracy, the information presented is subject to changes due to requirements in different sites, markets and/or countries. Rigel reserves the right to make the necessary amendments at

RIGEL INNOVATION CENTRE | No. 20 Changi Business Park Central 2 Singapore 486031 T : (65) 6812 6288 F : (65) 6812 6388 M : sales@rigel.com.sg www.rigel.com.sg

any time without prior notice.

INSTALLATION DETAILS

Reaul



Anti-Conflic



RC1000

Re



RIGEL